

LM79M05,LM79M12,LM79M15

LM79MXX Series 3-Terminal Negative Regulators



Literature Number: SNOS553C

LM79MXX Series 3-Terminal Negative Regulators

General Description

The LM79MXX series of 3-terminal regulators is available with fixed output voltages of $-5V$, $-12V$, and $-15V$. These devices need only one external component—a compensation capacitor at the output. The LM79MXX series is packaged in the TO-220 power package, and is capable of supplying 0.5A of output current.

These regulators employ internal current limiting, safe area protection, and thermal shutdown for protection against virtually all overload conditions.

Low ground pin current of the LM79MXX series allows output voltage to be easily boosted above the preset value with


a resistor divider. The low quiescent current of these devices with a specified maximum change with line and load ensures good regulation in the voltage boosted mode.

For output voltage other than $-5V$, $-12V$, and $-15V$ the LM137 series provides an output voltage range from $-1.2V$ to $-57V$.

Features

- Thermal, short circuit and safe area protection
- High ripple rejection
- 0.5A output current
- 4% tolerance on preset output voltage

Connection Diagram

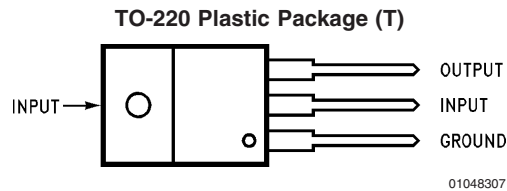

Front View

Order Number LM79M05CT, LM79M12CT or LM79M15CT
See NS Package Number T03B

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | | | |
|---------------------------|------|---------------------------------------|--------------------|
| Input Voltage | | Power Dissipation (Note 2) | Internally Limited |
| $V_O = -5V$ | -25V | Operating Junction Temperature Range | 0°C to +125°C |
| $V_O = -12V, -15V$ | -35V | Storage Temperature Range | -65°C to +150°C |
| Input/Output Differential | | Lead Temperature (Soldering, 10 sec.) | 230°C |
| $V_O = -5V$ | 25V | ESD Susceptibility | TBD |
| $V_O = -12V, -15V$ | 30V | | |

Electrical Characteristics LM79M05C

Conditions unless otherwise noted: $I_{OUT} = 350mA$, $C_{IN} = 2.2\mu F$, $C_{OUT} = 1\mu F$, $0^\circ C \leq T_J \leq +125^\circ C$

| Part Number | | | LM79M05C | | | Units |
|--|---|---|-----------------------|-----------------------|-------|---------|
| Output Voltage | | | -5V | | | |
| Input Voltage (Unless Otherwise Specified) | | | -10V | | | |
| Symbol | Parameter | Conditions | Min | Typ | Max | |
| V_O | Output Voltage | $T_J = 25^\circ C$ | -4.8 | -5.0 | -5.2 | V |
| | | $5mA \leq I_{OUT} \leq 350mA$ | -4.75 | | -5.25 | V |
| | | | (-25 ≤ V_{IN} ≤ -7) | | | |
| ΔV_O | Line Regulation | $T_J = 25^\circ C$ (Note 3) | | 8 | 50 | mV |
| | | | | (-25 ≤ V_{IN} ≤ -7) | | |
| | | | | 2 | 30 | mV |
| | | | (-18 ≤ V_{IN} ≤ -8) | | | |
| ΔV_O | Load Regulation | $T_J = 25^\circ C$, (Note 3) $5mA \leq I_{OUT} \leq 0.5A$ | | 30 | 100 | mV |
| I_Q | Quiescent Current | $T_J = 25^\circ C$ | | 1 | 2 | mA |
| ΔI_Q | Quiescent Current Change | With Input Voltage | | | 0.4 | mA |
| | | With Load, $5mA \leq I_{OUT} \leq 350mA$ | | | 0.4 | mA |
| V_n | Output Noise Voltage | $T_A = 25^\circ C$, $10Hz \leq f \leq 100Hz$ | | 150 | | μV |
| | Ripple Rejection | $f = 120Hz$ | 54 | 66 | | dB |
| | | | (-18 ≤ V_{IN} ≤ -8) | | | |
| | Dropout Voltage | $T_J = 25^\circ C$, $I_{OUT} = 0.5A$ | | 1.1 | | V |
| I_{OMAX} | Peak Output Current | $T_J = 25^\circ C$ | | 800 | | mA |
| | Average Temperature Coefficient of Output Voltage | $I_{OUT} = 5mA$, $0^\circ C \leq T_J \leq 100^\circ C$ | | -0.4 | | mV/°C |

Electrical Characteristics LM79M12C, LM79M15C

Conditions unless otherwise noted: $I_{OUT} = 350\text{mA}$, $C_{IN} = 2.2\mu\text{F}$, $C_{OUT} = 1\mu\text{F}$, $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$



| Part Number | | | LM79M12C | | | LM79M15C | | | Units | |
|--|---|---|----------|-------|-------|----------|-------|--------|----------------------------|----|
| Output Voltage | | | -12V | | | -15V | | | | |
| Input Voltage (Unless Otherwise Specified) | | | -19V | | | -23V | | | | |
| Symbol | Parameter | Conditions | Min | Typ | Max | Min | Typ | Max | | |
| V_O | Output Voltage | $T_J = 25^\circ\text{C}$ | -11.5 | -12.0 | -12.5 | -14.4 | -15.0 | -15.6 | V | |
| | | $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$ | -11.4 | | -12.6 | -14.25 | | -15.75 | V | |
| ΔV_O | Line Regulation | $T_J = 25^\circ\text{C}$ (Note 3) | | 5 | 80 | | 5 | 80 | mV | |
| | | | | | | | | | | mV |
| | | | | | | | | | | mV |
| ΔV_O | Load Regulation | $T_J = 25^\circ\text{C}$, (Note 3) $5\text{mA} \leq I_{OUT} \leq 0.5\text{A}$ | | 30 | 240 | | 30 | 240 | mV | |
| I_Q | Quiescent Current | $T_J = 25^\circ\text{C}$ | | 1.5 | 3 | | 1.5 | 3 | mA | |
| ΔI_Q | Quiescent Current Change | With Input Voltage | | | 0.4 | | | 0.4 | mA | |
| | | With Load, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$ | | | 0.4 | | | 0.4 | mA | |
| V_n | Output Noise Voltage | $T_A = 25^\circ\text{C}$, $10\text{Hz} \leq f \leq 100\text{Hz}$ | | 400 | | | 400 | | μV | |
| | Ripple Rejection | $f = 120\text{Hz}$ | 54 | 70 | | 54 | 70 | | dB | |
| | Dropout Voltage | $T_J = 25^\circ\text{C}$, $I_{OUT} = 0.5\text{A}$ | | 1.1 | | | 1.1 | | V | |
| I_{OMAX} | Peak Output Current | $T_J = 25^\circ\text{C}$ | | 800 | | | 800 | | mA | |
| | Average Temperature Coefficient of Output Voltage | $I_{OUT} = 5\text{mA}$, $0^\circ\text{C} \leq T_J \leq 100^\circ\text{C}$ | | -0.8 | | | -1.0 | | $\text{mV}/^\circ\text{C}$ | |

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics.


Note 2: Refer to Typical Performance Characteristics and Design Considerations for details.

Note 3: Regulation is measured at a constant junction temperature by pulse testing with a low duty cycle. Changes in output voltage due to heating effects must be taken into account.


Typical Performance Characteristics

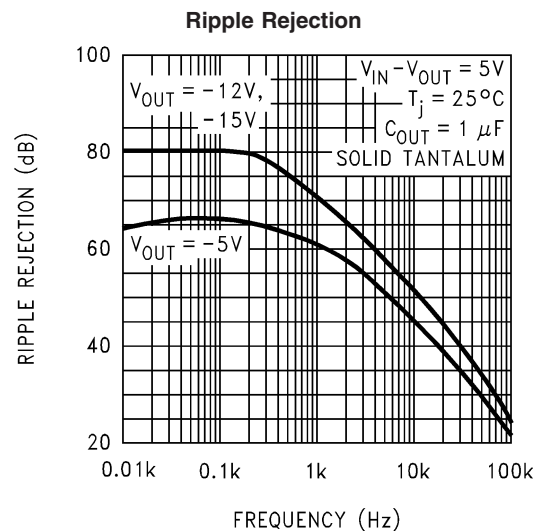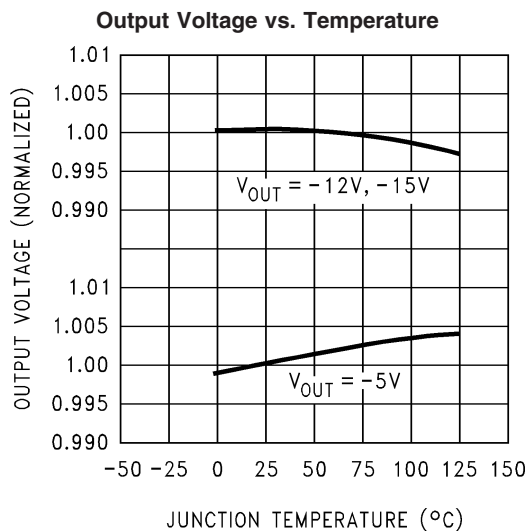


Typical Performance Characteristics (Continued)

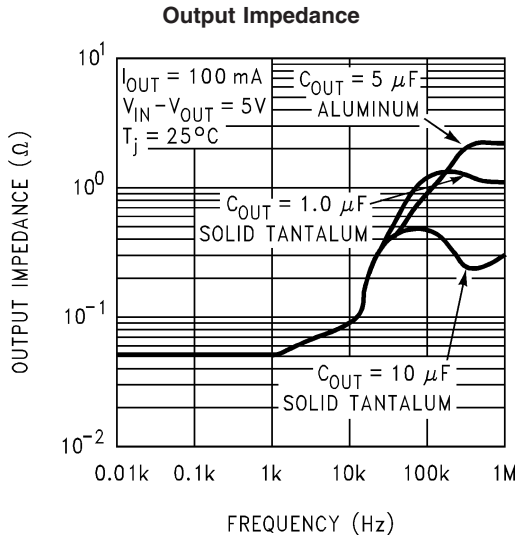


01048313

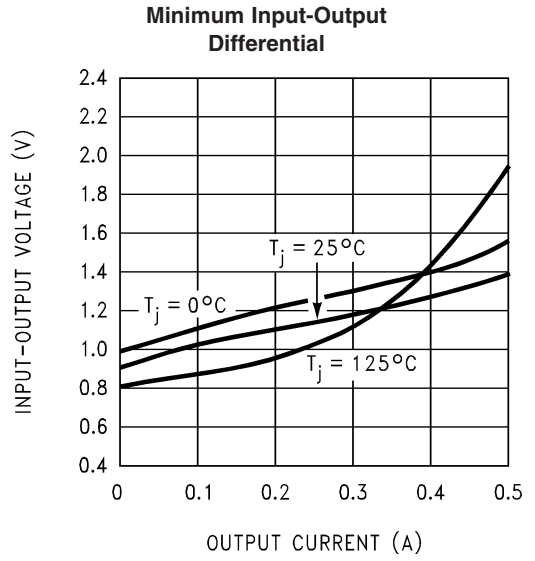

01048314

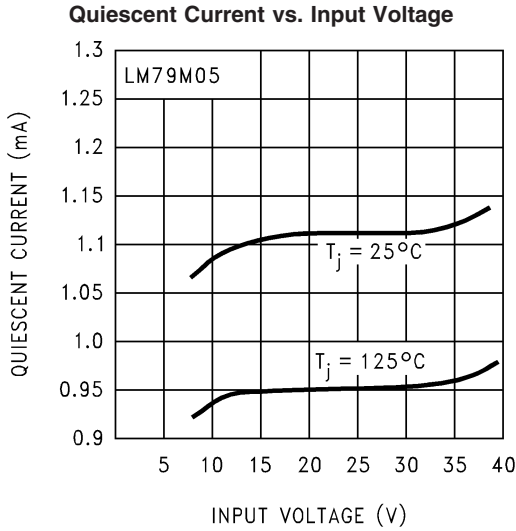


01048315

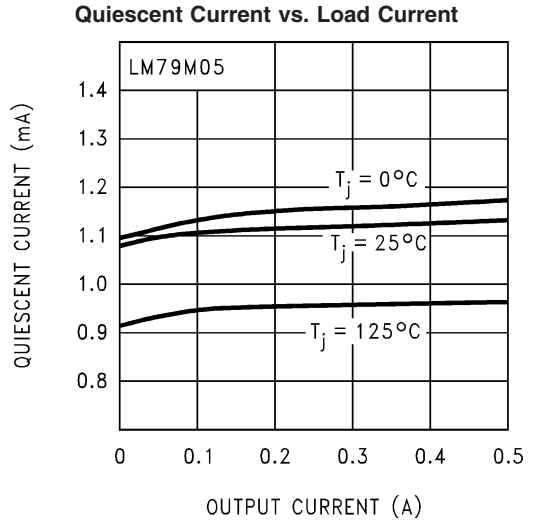


01048316

Typical Performance Characteristics (Continued)

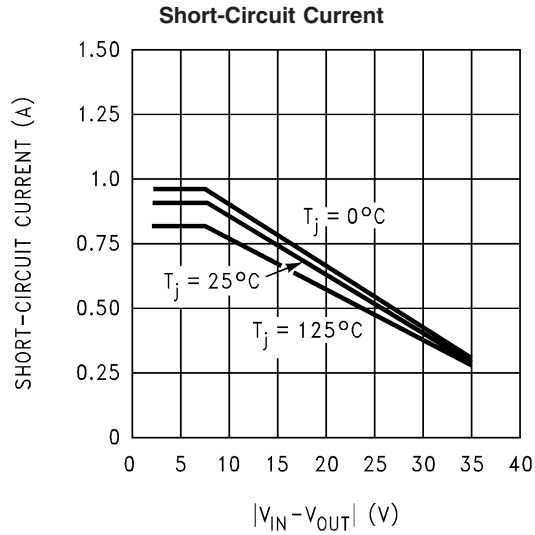


01048317

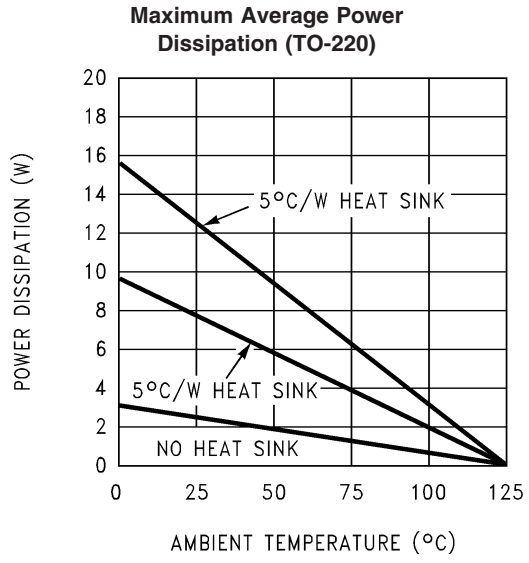

01048318

Schematic Diagrams


-5V

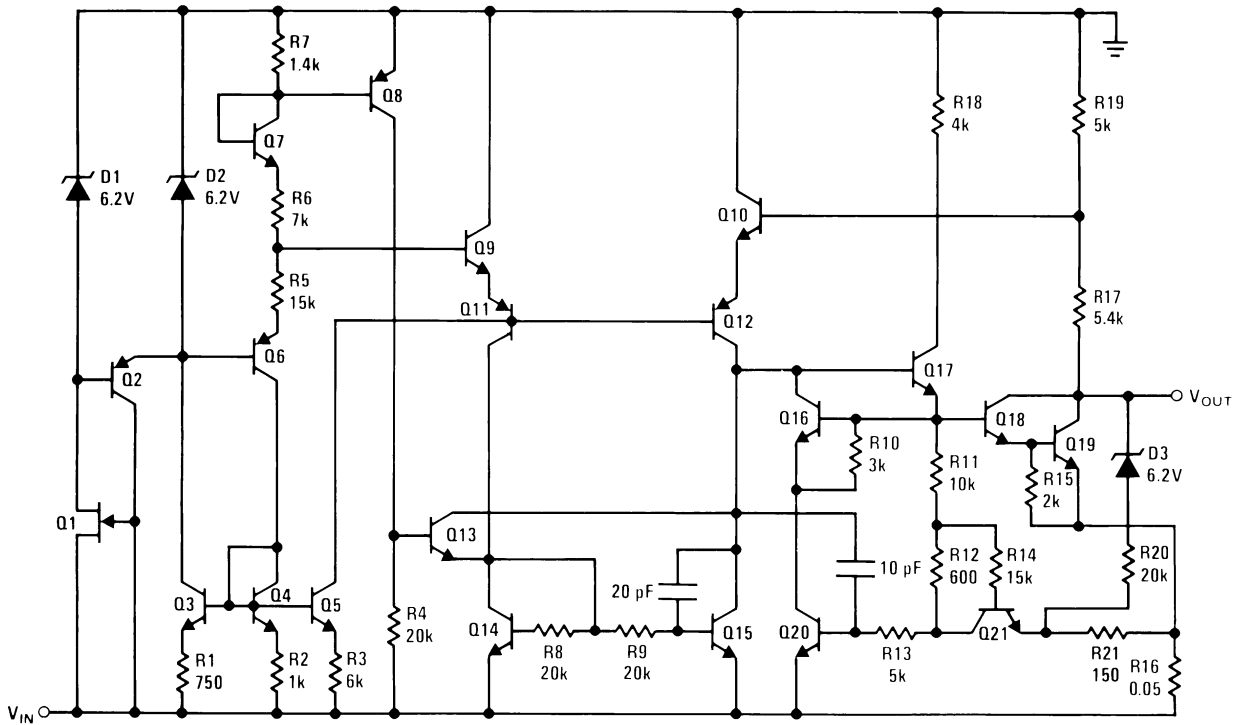

01048308

Schematic Diagrams (Continued)

-12V and -15V

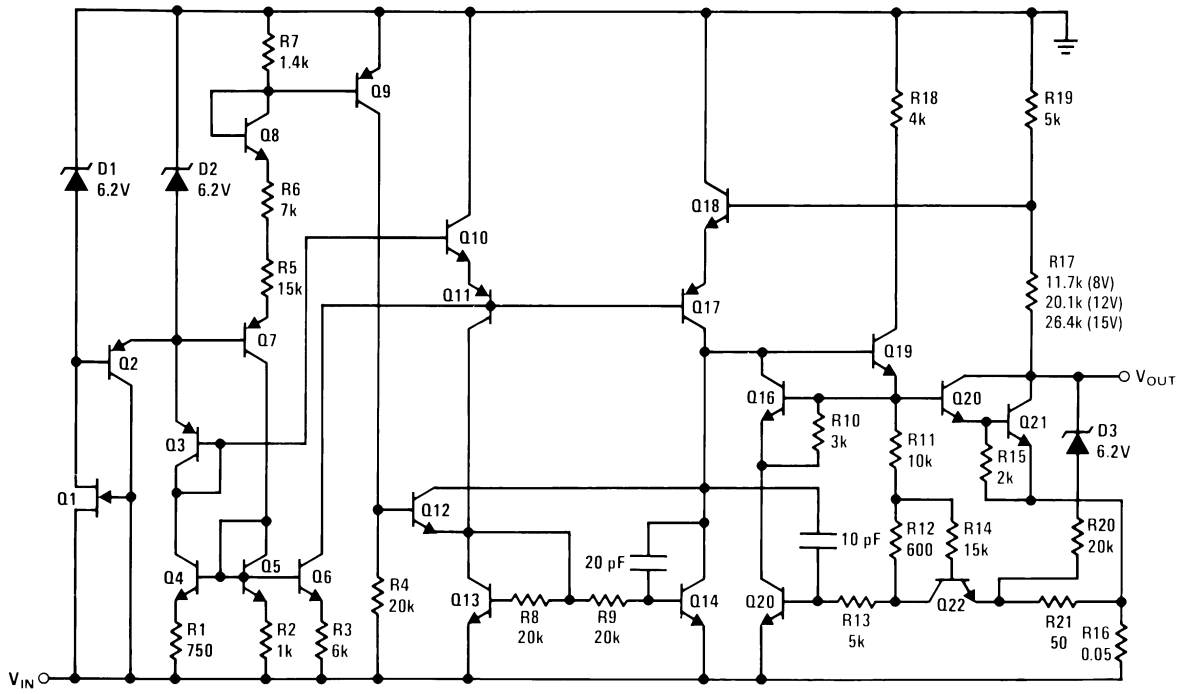

01048309

Design Considerations

The LM79MXX fixed voltage regulator series have thermal-overload protection from excessive power, internal short-circuit protection which limits the circuit's maximum current, and output transistor safe-area compensation for reducing the output current as the voltage across the pass transistor is increased.

Although the internal power dissipation is limited, the junction temperature must be kept below the maximum specified temperature in order to meet data sheet specifications. To calculate the maximum junction temperature or heat sink required, the following thermal resistance values should be used:

| Package | θ_{JC} (°C/W) | θ_{JA} (°C/W) |
|---------|-------------------------|-------------------------|
| TO-220 | 3 | 40 |

$$P_{D\text{MAX}} = \frac{T_{J\text{MAX}} - T_A}{\theta_{JC} + \theta_{CA}} \text{ or}$$

$$= \frac{T_{J\text{MAX}} - T_A}{\theta_{JA}} \text{ (Without a Heat Sink)}$$

(1)

$$\theta_{CA} = \theta_{CS} + \theta_{SA}$$

Solving for T_J :

$$T_J = T_A + P_D (\theta_{JC} + \theta_{CA}) \text{ or}$$

$$= T_A + P_D \theta_{JA} \text{ (Without a Heat Sink)}$$

Where

T_J = Junction Temperature

T_A = Ambient Temperature

P_D = Power Dissipation

θ_{JC} = Junction-to-Case Thermal Resistance

θ_{CA} = Case-to-Ambient Thermal Resistance

θ_{CS} = Case-to-Heat Sink Thermal Resistance

θ_{SA} = Heat Sink-to-Ambient Thermal Resistance


θ_{JA} = Junction-to-Ambient Thermal Resistance

Typical Applications

Bypass capacitors are necessary for stable operation of the LM79MXX series of regulators over the input voltage and output current ranges. Output bypass capacitors will improve the transient response of the regulator.

The bypass capacitors (2.2 μ F on the input, 1.0 μ F on the output), should be ceramic or solid tantalum which have good high frequency characteristics. If aluminum electrolytics are used, their values should be 10 μ F or larger. The bypass capacitors should be mounted with the shortest leads, and if possible, directly across the regulator terminals.

Fixed Regulator

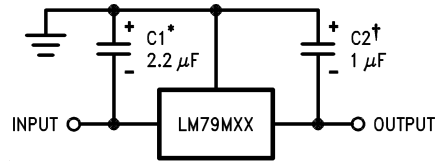


01048302

*Required if regulator is separated from filter capacitor by more than 3". For value given, capacitor must be solid tantalum. 25 μ F aluminum electrolytic may be substituted.

†Required for stability. For value given, capacitor must be solid tantalum. 25 μ F aluminum electrolytic may be substituted. Values given may be increased without limit.

For output capacitance in excess of 100 μ F, a high current diode from input to output (1N4001, etc.) will protect the regulator from momentary input shorts.

Variable Output

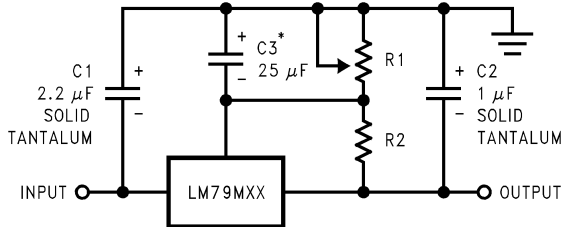

01048303

*Improves transient response and ripple rejection.

Do not increase beyond 50 μ F.

$$V_{\text{OUT}} = V_{\text{SET}} \left(\frac{R1 + R2}{R2} \right)$$

Select R2 as follows:


LM79M05C 300 Ω

LM79M12C 750 Ω

LM79M15C 1k

Physical Dimensions inches (millimeters)

unless otherwise noted

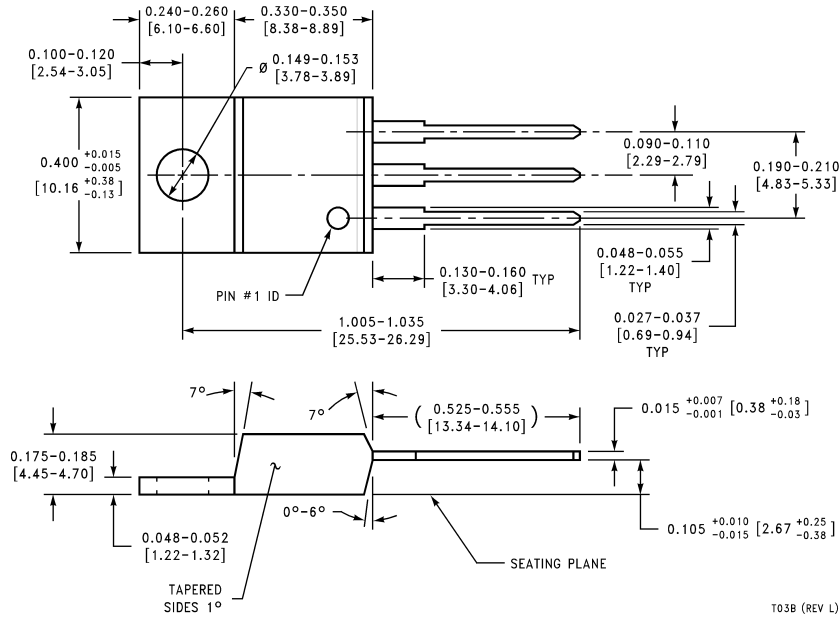

TO-220 Plastic Package (T)
Order Number LM79M05CT, LM79M12CT or LM79M15CT
NS Package Number T03B

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor certifies that the products and packing materials meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



National Semiconductor
Americas Customer
Support Center
 Email: new.feedback@nsc.com
 Tel: 1-800-272-9959

National Semiconductor
Europe Customer Support Center
 Fax: +49 (0) 180-530 85 86
 Email: europe.support@nsc.com
 Deutsch Tel: +49 (0) 69 9508 6208
 English Tel: +44 (0) 870 24 0 2171
 Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
 Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
 Fax: 81-3-5639-7507
 Email: jpn.feedback@nsc.com
 Tel: 81-3-5639-7560

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Mobile Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Transportation and Automotive | www.ti.com/automotive |
| Video and Imaging | www.ti.com/video |

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated